

# SkidWeigh

## ED2-TMLT Series

Lift Truck On-board Freight Check Weighing

### Automatic Freight Weight Verification for Truck/Trailer Mounted Forklifts

The **ED2-TMLT Series SkidWeigh** system is general application, fully automatic microprocessor electronic device that measures the load weight on any type of truck/trailer mounted forklift. The system can be installed on any lift truck, regardless of the vehicle, make, model or operating voltage having a maximum lifting capacity of up to 50,000 kg or lbs.

Every time a skid load is picked up, the increase in hydraulic pressure on the vehicle will automatically activate the "weighing cycle" and convert it to a load weight measurement that is visually presented to the operator via a five digit LED display.



**Step 1.** Pick up the skid and read the load weight shown on the indicator.

**Step 2.** Compare the indicated load weight against the reported load weight.

A. If the load weight variance is within the

acceptable company level, then the skid load can move to the destination trailer, holding area, etc.

B. If the load weight variance is over the acceptable company level, then the skid load is moved to the "Legal for Trade" floor scale for final verification and creation of a scale ticket.

#### *Example: Freight Transportation Facilities*

Based on typical freight weight charges of \$10.00\* per 100 pounds and with a weight recovery program of only 1,000 pounds per forklift, per working day; your company revenue can increase approximately \$ 25,000 per operator, per year.

This equates to a return of ten times your investment cost for the first year. Payback can be as little as four weeks, depending on the shipping practices of your customers and your timing and approach to recouping these lost revenues.

Note:\* *Depends on commodity, service level and distance*

#### **Benefits and ROI Analysis \***

Obviously the more forklifts equipped with on-board check weighing, the greater the potential return.

If it takes 10 forklifts to handle your cross dock volume and you have only one vehicle equipped with a SkidWeigh unit, you will be missing out on 90% of your potential freight weight recovery revenues.

\* See the article from National Freight Traffic Association "Weighing and Research Programs for Trucking Companies"



Electronic Digital Indicator


Review for Management ...

## Installation

The **ED2-TMLT Series SkidWeigh** System can be easily installed and calibrated by a local lift truck dealer technician or the end user's lift truck mechanic.

The installed system is calibrated with known skid load weights on the forks.

*Two button automatic calibration procedures are*

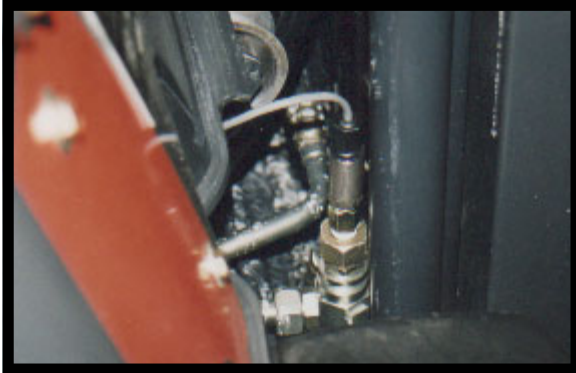

*done by lifting the empty and loaded forks.*



**Typical Installation of the ED2-FW Series Pressure Transducer in Lifting Hydraulic Circuit**

## Technical Data

### Electrical

- Voltage 12 to 55 V DC
- Current: Operating 100 to 300 mA

### Environmental

- Operating temperature  $-40^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$
- Water, dust and corrosion resistant, 4X protection

### Physical

- 120 x 80 x 55 mm, polycarbonate enclosure

### Technology

- Micro Controller

### Pressure Transducer

- Port connection, G1/4 with 1/4"-18 NPT adapter

- Proof pressure, 2.5 x range or 6,000 PSI
- Built-in pressure snubber
- Environmental: NEMA 4X
- Reverse polarity protection
- Over voltage protection
- Short circuit protection
- Housing material, Stainless steel, (AISI 303)
- Weight 95 grams
- Installation, unrestricted

### System Check Weighing Accuracy

+/- .5% to 1% of lift truck lifting capacity

### Mounting Bracket

- Adjustable mounting bracket included

### LED Display Indicator

- Readout type, large six LED digits
- Readout range 50,000 kg or pounds
- Bright red display intensity
- Operating humidity range, 0-95% R.H.



**Your Local Forklift Dealer**